

Electric Dehumidifier

# ROSAHL

## Instruction Manual

**M-1J1R / M-2J1R / M-3M1R / M-3J1R**  
**M-5J1R / M-7J1R / M-10J1R**

### NOTICE








1. Please read this manual before you use ROSAHL and use it correctly.
2. Please keep this manual to the person who operates, manages and maintains ROSAHL.



**RYOSAI TECHNICA CO., LTD.**

8-1-1 Tsukaguchi-Honmachi  
Amagasaki-City, Hyogo, 661-0001 Japan  
Phone : +81-6-6497-9078 Fax : +81-6-6497-9082

## For Proper Usage

- |   |   |
|---|---|
| <p>● Supply 3V DC to ROSAHL. <b><u>DO NOT reverse the polarity.</u></b><br/>Dehumidification changes to Humidification when you get a wrong polarity, which may result in an adverse effect on several things in the container. Furthermore, it causes a chemical reaction in a porous electrode of cathode side and it causes the trouble of ROSAHL.</p> | <br>Prohibited |
| <p>● Confirm the dehumidifying / humidifying surface of a membrane not to get a wrong direction before installation. Attaching ROSAHL by mistake will adversely several things in the container.</p>  | <br>Prohibited |
| <p>● DO NOT expose the membrane directly to the winds and rain.<br/>Please cover the membrane with a cover or moisture-permeable sheet to prevent it from getting wet when using outdoors.</p>  | <br>Prohibited |
| <p>● DO NOT put pin or wire etc into the membrane. It may cause an electric shock and the membrane may be damaged or deteriorate.</p>   | <br>Prohibited |
| <p>● <b><u>DO NOT use a silicon-based sealing materials</u></b> to improve airtightness of a container. Silicon-based sealing materials generate oxime gas and siloxane gas. As a result, the performance of ROSAHL reduce in a short term.</p>   | <br>Prohibited |
| <p>● <b><u>DO NOT use ROSAHL with vapor phase corrosion inhibitor</u></b> or insect repellent. Do not use ROSAHL in a place having high density of organic gas. The performance of ROSAHL reduce in a short term.</p>   | <br>Prohibited |
| <p>● DO NOT attempt to disassemble, repair or modify ROSAHL. It may cause an electric shock and the performance deterioration, as this may damage it.</p>   | <br>Prohibited |

## Installation

Make a moisture discharging hole and installation hole for the following dimensions on the container, insert the included gasket and attach ROSAHL with screws.

Note 1) Processed dimensions for Moisture discharging hole and Installation hole, refer to Table 1.

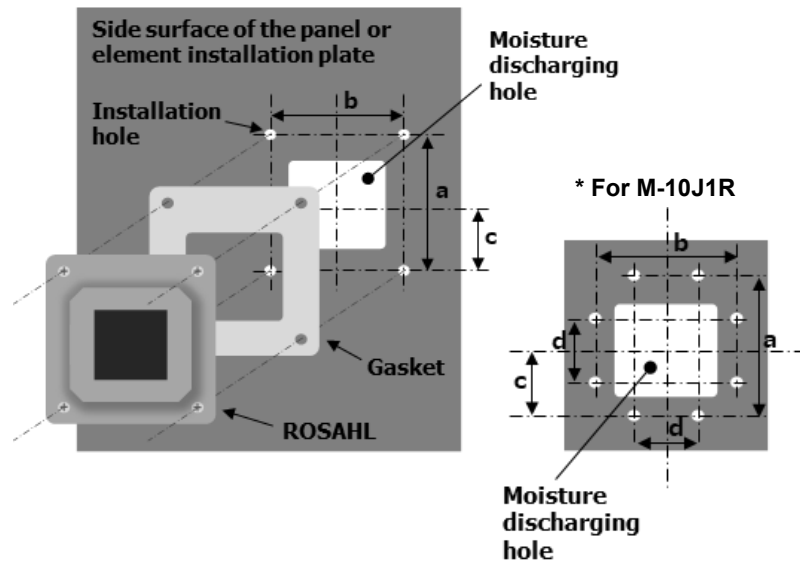
Note 2) Processed dimensions for Rainproof cover, refer to Table 2.

**Table 1. Installation dimensions (mm)**

Model name	M-1J1R	M-2J1R	M-3M1R	M-3J1R
Moisture discharging hole dimensions	20×25	35×25	35×35	55×30
Dim. a	37	52	48	65
Dim. b	42	42	50	50
Dim. c	18.5	26	24	32.5
Dim. d	-			
Screws	4-M3 screws			

Model name	M-5J1R	M-7J1R	M-10J1R
Moisture discharging hole dimensions	55×55	75×75	105×105
Dim. a	76	108	152.5
Dim. b	76	95	145
Dim. c	38	50.5	72.5
Dim. d	-	-	80
Screws	4-M3 screws	4-M4 screws	8-M4 screws




**Table 2. Rainproof cover installation dimensions (mm)**

\*Option parts

Model name	M-1J1R	M-2J1R	M-3M1R	M-3J1R
Dim. e	85			
Dim. f	115			
Rainproof cover Model name	For RDH-3J1			
Screws	4-M4 screws			

Model name	M-5J1R	M-7J1R	M-10J1R
Dim. e	135	175	225
Dim. f	125	150	180
Rainproof cover Model name	For RDH-5J1	For RDH-7J1	For RDH-10J1
Screws	4-M4 screws		

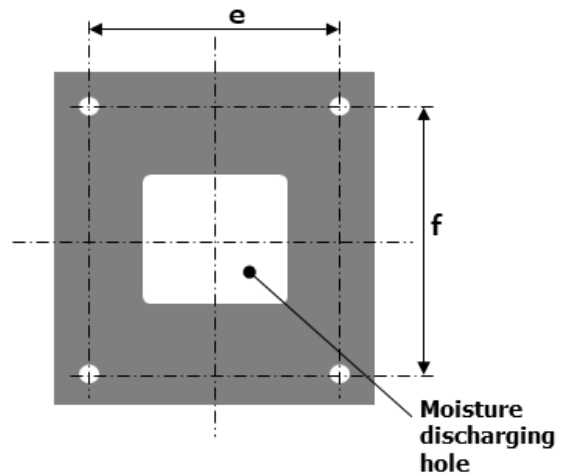

## Precautions for Use of ROSAHL

- 1) Attach a protective cover as needed not to touch the dehumidifying / humidifying surface of a membrane with a hand and an object.
- 2) Confirm the dehumidifying / humidifying surface of a membrane not to get a wrong direction before installation. Attaching ROSAHL by mistake will adversely affect several things in the container.
- 3) Keep strictly the following about power supply to ROSAHL
  - (1) Do not reverse the polarity. Confirm a polarity indication of ROSAHL.  
Dehumidification changes to humidification when you get a wrong polarity, which may result in an adverse effect on several things in the container. Furthermore, it causes a chemical reaction in a porous electrode of cathode side and it causes the trouble of ROSAHL.
  - (2) ROSAHL usually has a big rush current when the power is turned on.  
Therefore, we recommend the following power supply.
  - (3) Use a dedicated power supply for each membrane. When multiple membrane are connected in series or parallel, the trouble of one membrane may cause all other membranes to be disabled.
  - (4) The water vapor go through a membrane of ROSAHL. If you switch off a power supply, outside water vapor is returned into a container and the humidity is restored.

Table 1. Recommended Power Supply Specifications

Item	Model	M-1J1R	M-2J1R	M-3M1R	M-3J1R	M-5J1R	M-7J1R	M-10J1R
Rated output voltage		3V DC						
Rated output current		1A	1.5A	2A	2A	3A	5A	10A
Overcurrent protection function * Note		Required						
Overvoltage protection function		Required						
Output voltage variation		0.1V or less						
Ripple noise		0.2V or less						
Others		In accordance with the specifications of commercially available power supply						

Note : Use a constant or fold-back current limiting regarding overcurrent protection function. You cannot use the power supply with the Hiccup mode current limiting type, because the voltage more than 2V DC is necessary for ROSAHL when an overcurrent protection function worked. Also ROSAHL may not work correctly depending on a characteristic of fold-back current limiting.

- 4) A container must be an airtightness container. If a container has low airtightness and moisture-permeable material, the results may not be what you expected.
- 5) Attach ROSAHL in the center of the inner side surface of a container with a gasket.  
(Do not attach it on a top or bottom surface.)
- 6) If you use ROSAHL with a gasket that contains an antioxidant, crystal materials may be generated on the surface of a membrane. When you choose a gasket, evaluate it enough.
- 7) Do not use silicon-based sealing materials to improve airtightness of a container.  
(Silicon-based sealing materials generate oxime gas and siloxane gas.  
As a result, the performance of ROSAHL reduce in a short term.)  
Additionally, when using any other sealing materials, ROSAHL must be attached after sealing materials are completely cured. Volatile substances generated during curing affect the performance of ROSAHL.  
[Recommended products] : modified silicon caulk (Konishi Co., Ltd.)
- 8) Do not expose a moisture discharging side of a membrane to water. When using outdoors, be sure to attach a cover or vent filter to protect a membrane from water or insects.
- 9) Attach a moisture-permeable sheet to a membrane to protect ROSAHL from much dust or oil mists.  
[Recommended products] : Vent Filter TEMISH S-NTF2131A-S06 (Nitto Denko Corporation)
- 10) Keep the moisture discharging side of a membrane well ventilated.
- 11) Do not use ROSAHL with vapor phase corrosion inhibitor or insect repellent.  
Do not use ROSAHL in a place having high density of organic gas.
- 12) Do not do remodeling. ROSAHL may break down.
- 13) When you prepare a gasket, we recommend a sponge packing having closed-cell structure (hardness : 10 or less) of the EPT rubber (ethylene propylene rubber). When you use a high hardness packing, there may be a gap between installation plate and gasket. If there is a gap, the performance of ROSAHL may not be shown enough. Please evaluate it carefully.  
In addition, If you use a silicon rubber, you need to vulcanize a gasket (200 deg C / 6 hours) not to quickly degrade the performance of ROSAHL.  
Note : The silicon gasket assembled in ROSAHL is vulcanized. (conditions : 200 deg C / 6 hours)

## Confirmation Items before Using

Please confirm the following items surely before turning on the power.

1. Is the power supply 3V DC?
2. Is the polarity of ROSAHL correct?
3. Does not a membrane get wet?

## Usage

1. Please supply 3V DC to ROSAHL.
2. Please adjust a supply voltage in the range of 2.9 ~ 3.3V DC between each terminals after 15-20 minutes turning on the power at the first time of installation.  
(ROSAHL naturally causes a relatively big rush current when the power is turned on.  
But this is not abnormal.)


## Specifications

Model Name		M-1J1R	M-2J1R	M-3M1R	M-3J1R	M-5J1R	M-7J1R	M-10J1R
Items								
Dehumidifying Performance	(g/day) <sup>*1</sup>	1	2	2.9	4	8	16	29
Applicable Volume	(m <sup>3</sup> ) <sup>*2</sup>	~ 0.125	~ 0.25	~ 0.35	~ 0.5	~ 1	~ 2	~ 4
Terminal Voltage	(V)	3 DC						
Power Consumption	(W) <sup>*3</sup>	1	1.5	2	2	3	6	12
Dimensions	(mm) <sup>*4</sup>	52.5×50×16.5	67.5×50×16.5	65×62×16.5	74×58×16.5	89×84×16.5	117×105×17.5	162.5×155×17.5
Weight	(g)	70	85	90	95	150	340	580
Operating Temperature	(deg C)	-10 to 50						
Connecting Terminal Type		(+) side : TMEDN-480509-FA (NICHIFU Co.,Ltd.) or equivalent (-) side : TMEDN-630809-FA (NICHIFU Co.,Ltd.) or equivalent						

### Notes

- \*1 The initial value at the temperature of 30 deg C and humidity 60%RH.  
(The dehumidifying performance will reduce during use. How much it degrades depends on the operating environment and conditions. If any signs of abnormality are seen, early replacement is recommended.)
- \*2 The applicable volume is for a sealed, moisture-impermeable container, and may vary depending on the material of the container, state of sealing and required humidity.
- \*3 The annual average power consumption in average condition in Japan.
- \*4 Dimensions show the values of H × W × D in the figure below.

## Outline

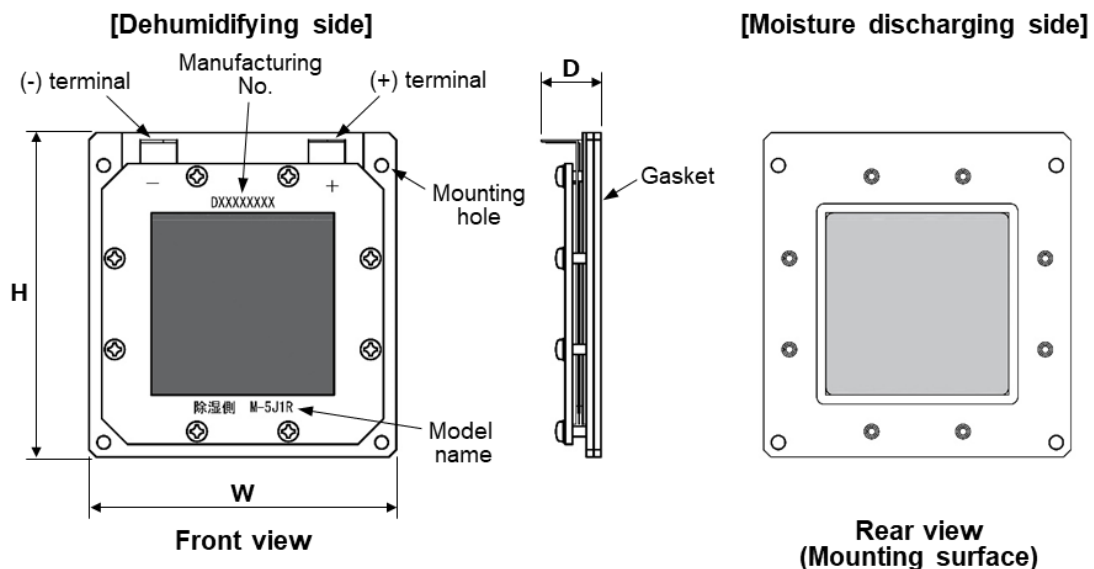

## Prohibited Substances and Recommended Materials for ROSAHL

### 1. Prohibited substances

The substances which adversely affect ROSAHL and harm in response to ROSAHL are as follows. The anode side is affected mainly. Even the additives of materials may be affected. Please evaluate enough when a new substance is adopted or a maker is changed.

Classification	Substance Name	State	Notes
Inorganic Matter	hydrochloric acid gas	gas	
	nitric acid gas	gas	
	other corrosion gases	gas	
	SOx gas	gas	
	NOx gas	gas	
	chlorine gas	gas	
	sulfurous acid gas	gas	
	other pollution gases	gas	
	concentrated hydrochloric acid	liquid	
	concentrated nitric acid	liquid	
	substance which produces other corrosion gas	liquid	
	divalent metal ion	liquid	
	Organic Matter	siloxane gas	gas
oxime gas		gas	
lamp black		gas	
diethylamine		gas	
other amine-based gas		gas	
amide-based low molecular weight compound		gas, liquid	
methylene chloride		liquid	
perchloroethylene		liquid	
trichloroethylene		liquid	
perchloroethylene		liquid	
tetrachloroethylene		liquid	
other chlorinated solvent		liquid	
oil mist		liquid	
dimethyl sulfoxide		liquid	
other sulfur based organic solvent		liquid	
silicone sealant		solid	These substances produce siloxane gas. Heat treatment (bake) is necessary to remove low molecule siloxane of non-reaction.
silicone grease		solid	
silicone rubber		solid	
silicone-based sealing compound		solid	
other siloxane chemical compound		solid	
pran-ace		solid	
camphor		solid	
other insect repellent		solid	
paradichlorobenzene		gas, liquid	
other chlorine-based insect repellent		gas, liquid	
vapor phase inhibitor		liquid, solid	
corrosion inhibitor which is added in materials		liquid, solid	
cigaret tar constituent		gas, liquid	
2,6-Di-tert-butyl-4-methylphenol (BHT)		liquid	The antioxidant which was added in packing

## 2. Recommended Materials

The recommended materials in a range understanding in us are as follows.

Classification	Material Name	Notes
Frame	Glass , Metal , Acrylic , Plastic	The acrylic and plastic resin has moisture permeability. Please thicken the board thickness when using them.
Sealing Compound	the material which does not include "Silicon group"  [Recommended products] modified silicon caulk (Konishi Co., Ltd.)	Do not use silicon-based sealing compounds. In addition, about the recommendation product, please operate ROSAHL after completely cured.  (Please avoid operating ROSAHL before curing.)
Adhesive	the material which does not include "Silicon group"  [Recommended products] Silex, SL220W, SL220LB (Konishi Co., Ltd.)	Do not use silicon-based adhesives.
Gasket	Silicon rubber (secondary vulcanization finished) EPT rubber [Ethylene-propylene] (single bubble) PTFE rubber [Polytetrafluoroethylene]	About the silicon rubber, please perform secondary vulcanization by all means. (ex. 200 deg C / 6 hours) In addition, we don't evaluate all silicon rubber, EPT rubber, PTFE rubber. Please evaluate enough when using them.

The above are just as of April 1, 2021 but not all of them. Please verify in advance and evaluate enough when using our electric dehumidifier "ROSAHL". We don't take any responsibility or liability for any damage or loss caused through the unknown phenomenon and the wrong usage.

### Precautions in the Use for the Storage Cabinet

1. When you use ROSAHL to dehumidify into the storage cabinet, do not store volatile rust preventive or things that organic gas volatilizes. The volatile gas which is released from goods reacted at a membrane's anode and new harmful gas is produced.  
As a result, not only it causes decrease in performance of ROSAHL, but also it might adversely affect on goods in the storage cabinet. We cannot guarantee even if harm occurs to the stored valuables under the influence of new produced gas. Please evaluate enough when you use ROSAHL for the storage cabinet.
2. The maker who produces and sells storage cabinet equipped with ROSAHL should explain that enough for end users using the storage cabinet.